


Lid open

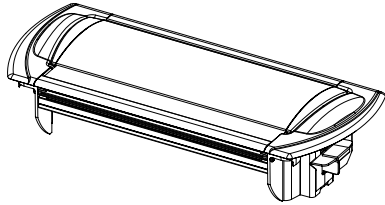


Lid closed


UK sockets with USB charging and data/AV shown for illustration purposes.

Mounting to desk


For a desk thickness of 10-50mm




The ratchet clamps must be removed if not already done so before inserting into the desk.



Lower the Affinity module into the desk aperture. 1*




On both ratchet clamps, remove paper backing from adhesive pads.




Slide clamps back in place until the pads make contact with desk.

Contents




Lid operation



Opening

Lift up the lid from the front lip adjacent to the brush strip. Open fully until a click is heard.




Closing


Depress the side buttons and gently lower the lid. Do not force closed if using large/bulky plugs.

Connecting to power

Connecting standard 3-pole connector




Plug the male 3-pole connector supplied as standard into a female powered connector. 2*




Ensure the attached locking mechanism clicks into place on both connectors.

Disconnecting standard 3-pole connector




Use a suitable tool to release the locking mechanism.




Separate the connectors.

Connecting data/AV (if applicable)



Offer up the data/AV cable connectors to the related ports on the module.




Connect cables from the module to the source. Use suitable cable management for safety.

USB charging (if applicable)



Insert the USB connector from your device into the related port on the module.



Ensure the cable is securely connected.

Additional information

Safety

- Installation is to be carried out in accordance with relevant Health & Safety regulations and only to be carried out by a skilled or competent person.
- The product should be installed to comply with the relevant national standards and be inspected and tested prior to being put into service (in the UK BS 7671 Wiring Regulations or BS 6396 Office and Educational Systems Best Practice).
- Isolate the supply before installation or repositioning. Any locking mechanisms must be used and fully engaged.
- Incorrect use could lead to risk of electrocution.
- Connectors must not be engaged or disengaged when under load or live.
- Product to be used only for the intended purpose of distributing power and data in office and commercial environments.
- Do not misuse, dismantle or re-configure the product because doing so will invalidate the warranty.

Standards

- Refer to the Declaration of Conformity.

Further guidance

- Fuse replacement only to be carried out by a skilled or competent person.
- Should the supply cable need replacing, contact CMD.

Product care

- Clean using a dry cloth. No abrasives or solvents to be used on the product.
- Do not drop or expose to moisture.

